

XTRACTA

WELDING DOWNDRAFT TABLE



DX3

WITH
X-PULSE
TECHNOLOGY

↓ **400 KG**
TABLE LOAD CAPACITY

||| **72 DB**
LOW NOISE LEVEL



PRODUCT DATA SHEET

POWERFUL FUME EXTRACTION. SMART FILTER CLEANING.

Engineered for high-performance, the **Betaweld XTRACTA DX3** delivers a powerful 2.2kW fume extraction system designed to handle the demanding conditions of modern welding environments.

The DX3 efficiently captures and filters harmful welding fumes at the source, helping maintain a cleaner and safer working environment. Its dual-direction airflow system allows filtered air to be recirculated back into the workspace, eliminating the need for an external exhaust system in suitable applications.

At the core of the DX3 is **X-Pulse filter-cleaning technology**, using controlled bursts of air to semi-automatically clean the M5 cartridge filters during operation. This helps maintain consistent extraction performance, maximise filter efficiency and extend filter service life.

The result is a robust, self-cleaning extraction solution engineered to deliver reliable fume capture, sustained performance and greater convenience - so you can focus on the job, not the fumes.

KEY FEATURES

- Dual-Direction Airflow effectively captures sparks and fume particles
- M5-Class Antistatic Cartridge Filters
- HEPA Cassette Filter for capturing ultra-fine particles
- Modular Grid Design to support segmented or jig-based welding
- Three-Sided Protective Enclosure minimises particle dispersion
- Powder-Coated Body offers long-life protection and durability
- Pneumatic Air and Electrical Outlets for easy tool operation
- Low Noise Levels with plug fan technology
- Integrated Dust Tray for convenient waste disposal

SUITABLE FOR

• Welding • Grinding • Polishing • Buffing • Finishing

APPROVALS CE

SPECIFICATIONS

Part No.	6069
Primary Input Voltage	415V
Motor Output	2.2kW
Plug Type	415V 5 Pin
Electrical Outlet Connection	240V
Pneumatic Outlet Connection	Chrome Nitto Style 30sm
Fan Capacity	6000m ³ /h
Filter Surface Area	20m ²
Table Surface Area	1500 x 900mm
Lighting	1W - 24V DC - 6500K - IP65
Warranty	3 Years*

SIZE & WEIGHT

Shield Height	650mm
Dimensions [L x W x H]:	1700mm x 1055mm x 1015mm
Machine Weight	300kg

*Excludes filters


betaweld[®]
creating better welding solutions


X-PULSE TECHNOLOGY

X-Pulse technology takes productivity to the next level. The Betaweld XTRACTA DX3 Downdraft Table features a semi-automatic X-Pulse cleaning system that allows filter cleaning without having to remove the filters or machine housing. When the automatic cleaning function is enabled, the machine's compressed air inlet activates the self-cleaning system, sending a pulse of air to push particles out. The integrated dust collection drawer ensures safe, clean, and environmentally friendly waste disposal.

PACKAGE CONTENTS


PART NO	DESCRIPTION
6069	XTRACTA DX3 Welding Downdraft Table
6171	M5 Cartridge Filter (2pcs)
6172	HEPA Filter Replacement
6173	Modular Downdraft Panel (4pcs)

* Other spare parts are available upon request

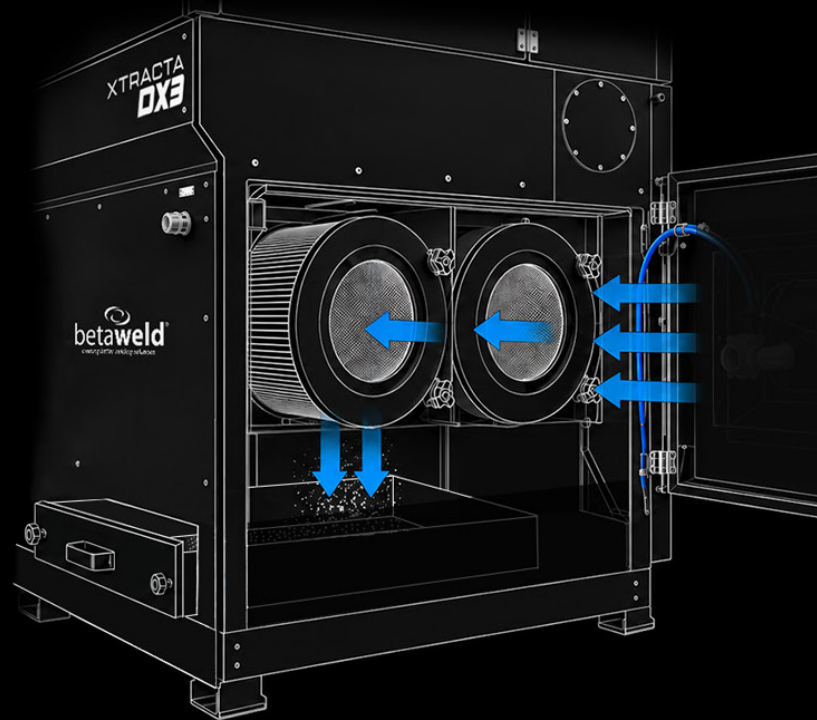

BACKDRAFT INTEGRATION

Vented backstop creates an enclosure that maximises fume capture

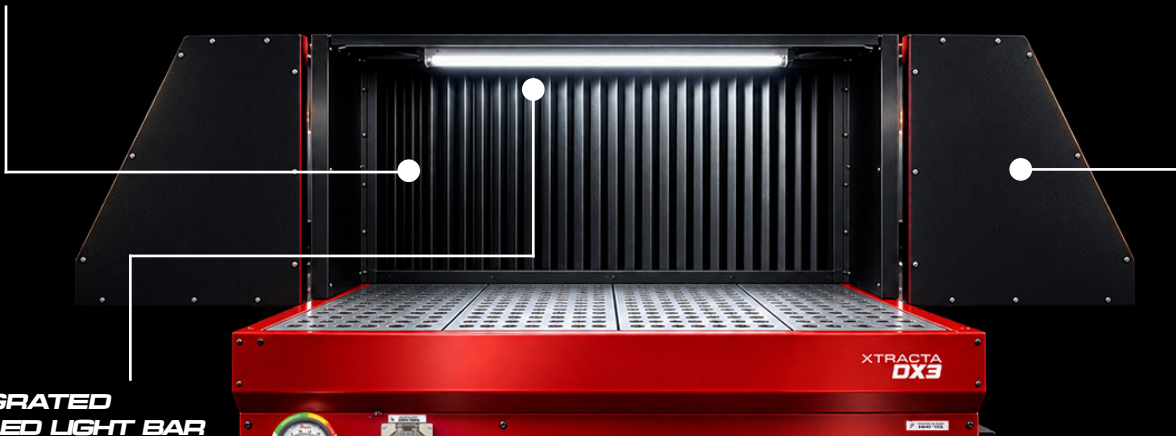

INTEGRATED 21W LED LIGHT BAR

Bright, focused illumination of your work area



ADJUSTABLE SIDE GUARDS

180 degrees for operational versatility

AVAILABLE NOW AT ALPHAWELD.COM.AU

Betaweld is a registered brand of Alphaweld Supply Group
1300 120 130 | BETAWELED.COM.AU

betaweld[®]
creating better welding solutions